

Sunmodule[®] Bisun SW 280 DUO BLACK



Data sheet



QUALITY BY SOLARWORLD

SolarWorld's foundation is built on more than 40 years of ongoing innovation, continuous optimization and technology expertise. All production steps from silicon to module are established at our production sites ensuring the highest possible quality for our customers. Our modules come in a variety of different sizes and power, making them suitable for all global applications – from residential solar systems to large-scale power plants.

- » SolarWorld's new Sunmodule Bisun solar panel offers up to 25% more yield thanks to the use of our latest, highly efficient PERC cell technology combined with SolarWorld duo cells. The duo cells are active on both the front and back, making them capable of converting light from all directions into power
- » The use of glass on the front and back of the module allows for optimal protection against mechanical loads and environmental factors
- » Extremely tough and stable, despite its light weight – able to handle loads up to 178 psf (8.5 kN/m²)
- » Tested in extreme weather conditions – hail-impact tested and resistant to salt spray, frost, ammonia, dust and sand
- » Proven guarantee against hotspots and PID-free to IEC 62804-1
- » SolarWorld Efficells™ for the highest possible energy yields
- » Patented corner design with integrated drainage for optimized self-cleaning
- » High-transmissive front glass with anti-reflective coating
- » Long-term safety and guaranteed top performance – 30-year linear performance warranty; 20-year product warranty



Sunmodule[®] Bisun SW 280 DUO BLACK



PERFORMANCE UNDER OPTIMIZED CONDITIONS

Energy boost		6 %	10 %	20 %	25 %
Maximum power	P_{max}	303.9 Wp	314.9 Wp	342.3 Wp	355.9 Wp
Open circuit voltage	V_{oc}	39.47 V	39.40 V	39.30 V	39.20 V
Maximum power point voltage	V_{mpp}	31.72 V	31.70 V	31.60 V	31.50 V
Short circuit current	I_{sc}	10.16 A	10.54 A	11.50 A	11.98 A
Maximum power point current	I_{mpp}	9.58 A	9.94 A	10.84 A	11.80 A
Module efficiency	η_m	18.12 %	18.78 %	20.42 %	21.23 %

Consistent with BIF116 according to IEC 60904-1-2

PERFORMANCE UNDER STANDARD TEST CONDITIONS (STC)*

Maximum power	P_{max}	280 Wp
Open circuit voltage	V_{oc}	39.5 V
Maximum power point voltage	V_{mpp}	31.8 V
Short circuit current	I_{sc}	9.49 A
Maximum power point current	I_{mpp}	8.95 A
Module efficiency	η_m	16.70 %

Measuring tolerance (P_{max}) traceable to TUV Rheinland: +/- 2% (TUV Power controlled, ID 0000039351)

*STC: 1000W/m², 25 °C, AM 1.5

PERFORMANCE AT 800 W/m², NOCT, AM 1.5

Maximum power	P_{max}	212.5 Wp
Open circuit voltage	V_{oc}	36.6 V
Maximum power point voltage	V_{mpp}	29.4 V
Short circuit current	I_{sc}	7.77 A
Maximum power point current	I_{mpp}	7.23 A
Module efficiency	η_m	12.70 %

Minor reduction in efficiency under partial load conditions at 25 °C: at 200 W/m², 97% (+/-3%) of the STC efficiency (1000 W/m²) is achieved.

PARAMETERS FOR OPTIMAL SYSTEM INTEGRATION

Power sorting	-0 Wp / +10 Wp
Maximum system voltage SC II / NEC	1000 V
Maximum reverse current	25 A
Number of bypass diodes	3
Operating temperature	-40 to +85 °C
Maximum design loads (Two rail system)*	113 psf downward, 64 psf upward
Maximum design loads (Three rail system)*	178 psf downward, 64 psf upward

*Please refer to the Sunmodule installation instructions for the details associated with these load cases.

COMPONENT MATERIALS

Cells per module	60
Cell type	Bifacial duo
Cell dimensions	6 in x 6 in (156 mm x 156 mm)
Front	Heat-strengthened glass with ARC (EN 1863-1)
Back	Heat-strengthened glass (EN 1863-1)
Frame	Black anodized aluminum
J-Box	IP65
Connector	PV wire (UL4703) with Amphenol UTX connectors
Module fire performance	(UL 1703) Type 3

DIMENSIONS / WEIGHT


Length	65.95 in (1675 mm)
Width	39.40 in (1001 mm)
Height	1.30 in (33 mm)
Weight	47.4 lb (21.5 kg)

THERMAL CHARACTERISTICS

NOCT	46 °C
TC I_{sc}	0.06 % /C
TC V_{oc}	-0.29 % /C
TC P_{mpp}	-0.40 % /C

ORDERING INFORMATION

Order number	Description
82000252	Sunmodule Bisun SW 280 duo black

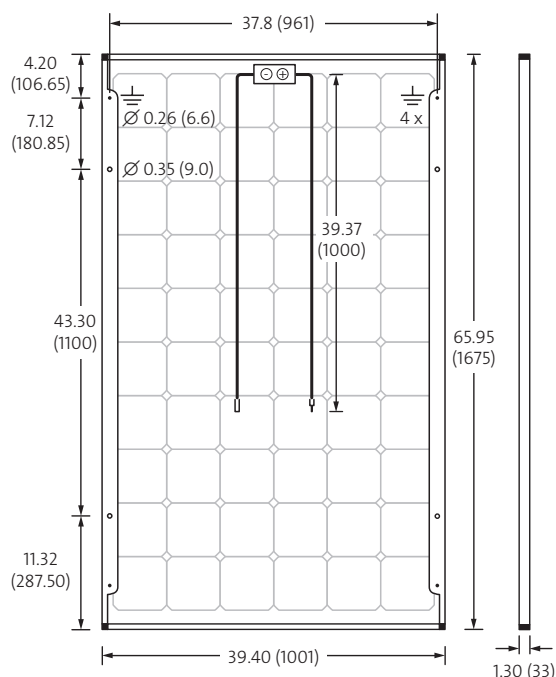

All units provided are imperial. SI units provided in parentheses.

CERTIFICATES AND WARRANTIES

Certificates	IEC 61730	IEC 61215	UL 1703
	IEC 62716	IEC 60068-2-68	IEC 61701
Warranties	Product Warranty	20 years	
	Linear Performance Guarantee	30 years	